

Boavista



insidafoto


DE RIGO
SURFRIGO  **Detroit**

Boavista

Espositore verticale a temperatura positiva per l'esposizione e vendita di latticini, salumi, ortofrutta.

GB Chiller multideck for dairy products and sausages, fruit and vegetable.
F Vitrine verticale à température positive pour produits laitiers, charcuterie, fruits et légumes.
D Wandkühlregal für Molkereiprodukte, Wurstwaren, Obst u. Gemüse.
E Mural frente ultra bajo por lacteos, charcuteria y fruiter.
RUS Холодильная горка, подходящая для экспозиции молока и овощей и фруктов.

Campionario colori / colour sample / farbenmuster / echantillon couleurs / lista colores

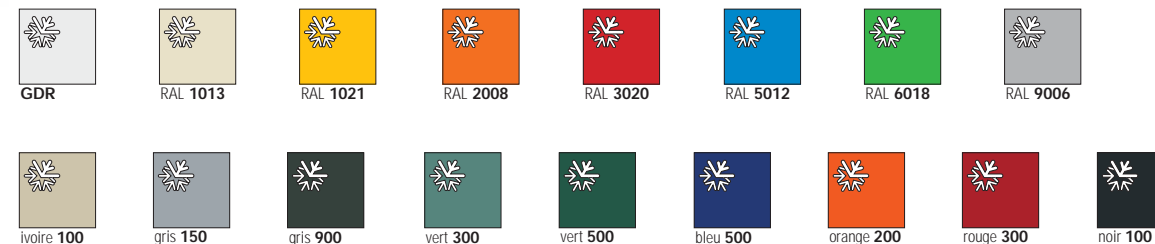

Upon request
akzo nobel - sable


DATI TECNICI

Boavista


H M2

Parametro	Unità	Modello	1875	2500	3750	1875	2500	3750
Lunghezza length/ longueur/ länge/ longitud	mm		1875	2500	3750	1875	2500	3750
Spessore spalla thickness of end/ épaisseur joue/ seitenteil dicke/ espesor del lateral	mm		35 max 40			35 max 40		
Superficie espositiva display area/ surface d'exposition/ Ausstellungsfläche/ superficie expositiva	m ²	P950 HF300 H2040 HF300 H2250	3,22 3,61	4,29 4,81	6,43 7,22	3,22 3,61	4,29 4,81	6,43 7,22
		P1130 HF300 H2040 HF300 H2250	3,55 3,95	4,74 5,26	7,11 7,89	3,55 3,95	4,74 5,26	7,11 7,89
Volume lordo gross loading capacity/ capacité de chargement brut/ Inhalt/ capacidad de carga bruta	m ³	P950 HF300 H2040 HF300 H2250	1,28 1,48	1,70 1,97	2,55 2,95	1,28 1,48	1,70 1,97	2,55 2,95
		P1130 HF300 H2040 HF300 H2250	1,37 1,57	1,83 2,10	2,75 3,14	1,37 1,57	1,83 2,10	2,75 3,14
Potenza elettrica nominale rating power/ puissance absorbée/ Leistungsaufnahme/ potencia absorbida	W	P950 HF300 H2040 HF300 H2250	262 262	274 274	411 411	262 262	274 274	411 411
		P1130 HF300 H2040 HF300 H2250	262 262	274 274	411 411	262 262	274 274	411 411
Potenza elettrica assorbita in sbrinamento defrosting power/ puissance pour le dégivrage/ Abtaungsleistungsaufnahme/ potencia descongelación	W	P950 HF300 H2040 HF300 H2250	262 262	274 274	411 411	262 262	274 274	411 411
		P1130 HF300 H2040 HF300 H2250	262 262	274 274	411 411	262 262	274 274	411 411
Temperatura d'esercizio running temperature/ température de fonctionnement/ betriebstemperatur/ temperatura de ejercicio	°C		+6° / +8°			+3° / +5°		


Boavista H2250 - 950

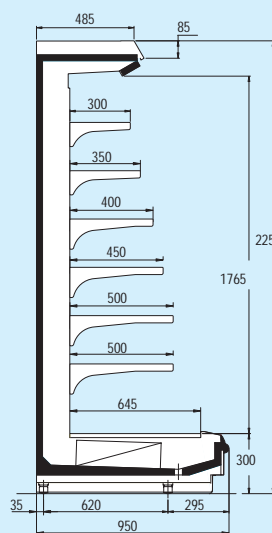


Boavista H2040 - 950

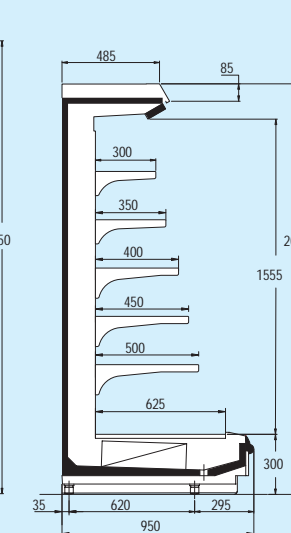

Boavista H2250 - 1130

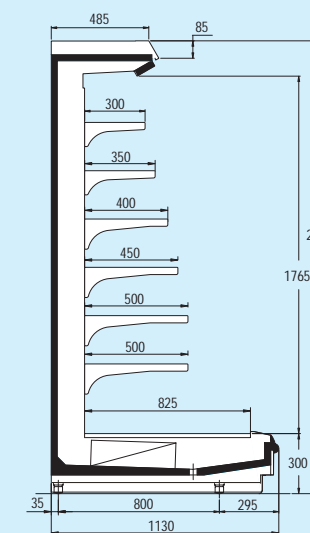


Boavista H2040 - 1130

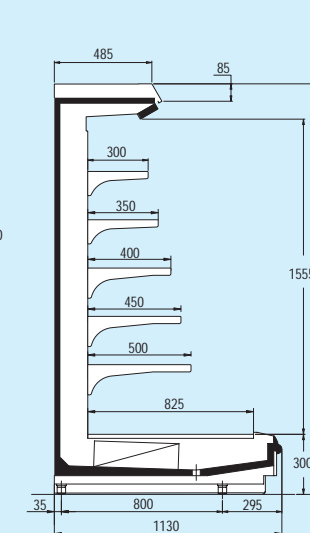


Testate

Boavista P950 + P950



Testate

Boavista P1130 + P1130



Boavista

A richiesta interno nero.
On request black interior.

L'azienda si riserva di apportare modifiche tecniche senza preavviso. - The Company reserves the right to modify these models without advise. - La société se réserve le droit d'apporter modifications techniques sans préavis. - Der hersteller behält sich mögliche Änderungen ohne vorherige Mitteilung vor. - La sociedad se reserva el derecho de introducir modificaciones sin previo aviso.

DE RIGO REFRIGERATION srl

Sede Legale Amministrativa e Stabilimenti Via Cavassico Inferiore, 1 - 32028 Trichiana BL - Italy
 Tel. +39 0437 5591 Fax +39 0437 559300 - info@derigorefrigeration.com - expsales@derigorefrigeration.com
 Stabilimento di Ronchi dei Legionari Via Redipuglia, 163 - 34077 Ronchi dei Legionari GO - Italy
 Tel. +39 0481 477411 Fax +39 0481 776330 - vendite@derigorefrigeration.com
 Stabilimento di Pomezia Via Naro, 71 - 00040 Pomezia - Roma - Italy
 Tel. +39 06 9106611 Fax +39 06 9120296 - roma@derigorefrigeration.com
 www.derigorefrigeration.com

